


Connecting the Wifi system to the target and firing range

Target side

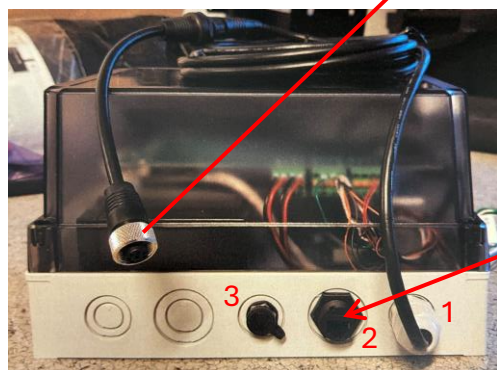

Gateway with battery

1. Connect the target plug to the target
2. Connect the Wifi antenna to the gateway
3. Battery charger

This unit replace the target cabinet!



1. Connect the target plug to the target outlet on the cabinet
2. Connect the Wifi antenna to the gateway

Place the antenna as high as possible! (you may change the Cat cable to a longer cable if necessary.)

When connecting, please run the target to the middle of the track to get good connection when starting up!